

Technical Information

KOARMISTOR SERIES 7321

BLENDABLE NTC THERMISTOR PASTES

The 7321 series NTC thermistors are designed to provide excellent temperature response and stability in small geometries. They are suitable for the fabrication of discrete surface mount components. They are also useful for the integration of temperature sensing, impedance matching, current limiting, or switching sub-circuitry. Key features of the system include:

- Wide Resistivity Range
- Large Beta Constant, Small Hysteresis
- Blendability Across the Full Range.
- Firing in Standard 850°C Profile.
- Compatibility with 100% Ag, Ag:Pd, and Gold Termination.
- Passivation with Low Temperature Overglaze or polymer encapsulant.

TYPICAL FIRED FILM CHARACTERISTICS⁽¹⁾

	7321	7322	7323	7324	7325
Resistivity ⁽²⁾ Ohms / Square	250 ± 20%	500 ± 20%	1K ± 20%	10 K ± 20%	100 K ± 20%
Beta Constant + 25°C to +125°	-800 ± 100	-1200 ± 100	-1400 ± 100	-2100 ± 100	-2500 ± 100
Hysteresis ⁽³⁾ % change in Beta	< 0.1	< 0.1	< 0.1	< 0.1	< 0.3

- (1) Typical properties are based on testing of several batches under various processing conditions. They are not intended as specification limits.
- (2) The electrical results are based on 0.040" x 0.040" pads, fabricated with 7321 series thermistors and 6261 palladium-silver termination. All firing done in a standard 36 minute furnace profile with 10 minutes at 850°C.
- (3) Change in Beta after four cycles from -55°C to +125°C

COMPOSITION PROPERTIES

Viscosity: 150 ± 30 Kcps, when measured with Brookfield HBT, Spindle #14, utility cup, 10 RPM, 25°C.

Specific Gravity: 2.0 - 2.4 g/cm³

Recommended Thinner: KOARTAN A-1039


RECOMMENDED PROCESSING PROCEDURE

Printing: For best results, printing with a 325 mesh stainless steel screen with 10-15 μm emulsion and 45 degree angle is recommended. Other mesh counts, 200-250, and emulsion thicknesses, 5-25 μm , may be used for special applications.

Coverage is approximately 120 cm^2 , when utilizing 325 mesh screen and a wet print thickness of about 38 μm .

Drying: Wet prints should be allowed to level for 5-10 minutes prior to drying. Dry for 10-15 minutes in a convection oven or belt dryer at 125°C-150°C.

Firing: Firing in air using a belt furnace and a 36-60 minute profile, with 10 minutes at a peak temperature of 850°C, is recommended. Air flow rates must be optimized to ensure that the products of binder burn-off discharge properly and create a fully oxidizing atmosphere in the muffle.

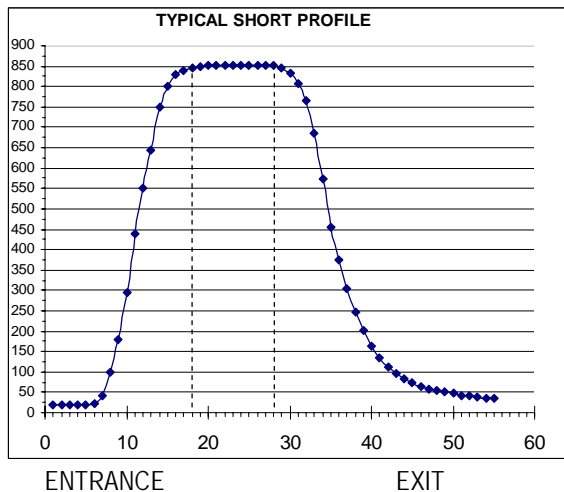

Application Notes: The data provided in this brochure was generated on 0.040" x 0.040" pads, terminated with a 6:1 Ag:Pd conductor and fired as above. To utilize the highest Beta for any particular application, it

is recommended that the highest permissible resistivity Koarmistor paste or blend be selected. Partial square geometries may be designed for this purpose. Higher silver content termination inks, including 100% Ag conductors, are compatible with Koarmistor series thermistors. The choice of termination material should be dictated by overall reliability and cost goals. Silver based termination materials provide economy, as well as larger and more linear beta. They should be selected whenever the packaging technology used allows their utilization.

The Koarmistor 7321 series thermistors are relatively insensitive to furnace profile. Longer profiles and higher peak temperatures generally produce slightly lower resistivity and higher beta. Utilization of such profiles are recommended only when they are readily available or minor improvement in properties is crucial to fabrication of acceptable parts

Passivation: Low temperature overglaze such as KOARTAN 5650, or polymer encapsulant is recommended. Please consult Koartan's technical staff for recommendation for your particular application.

Storage and Shelf Life: Store in tightly capped containers at room temperature. Shelf life is 6 months for unopened jars. Thorough mixing of the paste before each use is recommended. Under ordinary conditions of storage and use the product should not require thinning. However, solvent loss during extended printing runs may be corrected by incorporating up to 0.5% of Koartan A-1039 thinner.

The information presented herein is based on data believed to be dependable and is accurate and reliable to the best of our knowledge and belief, but not guaranteed to be so. Koartan Company assumes no liability arising from the use of this product or the information provided herein. Nothing herein is to be construed as recommending any practice or any product in violation of any patent or in violation of any law or regulation.